

Car Spray Booth

GSP-1000



ราคา 410,000 บาท

Model No.	GSP-1000	
Product Name	Spray booth	
External Size	7.00*5.35*3.40(m)	
Internal Size	6.90*3.90*2.65(m)	
Door Size	3.00*2.60(m)	
Total Power	7 KW	
Wall panel	Color	White
	material	EPS, Thickness: 50mm (Rock wool is optional)
	Color steel	Thickness: 0.376mm
Basement	Floor	Steel structure, 2 rows of grids, 3 rows of veins board.
	Ramps	2 pieces diamond plates style ramps 630*2000mm(W*L)
Light system	Top light	8Sets*4Pcs*16W=512W, room illumination ≥800LUX
	Side light	No
Intake system	Intake fan	2 set of 3kw centrifugal fan, air capacity: 22000m3/hr
Exhaust system	Exhaust fan	No
Filter system	Intake air	Initial effect filter
	Static pressure chamber	600G Sub-high efficiency filtration cotton
Heating system	Burner	Riello G10 diesel burner
	exchange	Stainless steel
	Imported electric damper performer.	
Electronic control system	With 2 side lighting, normal /constant temperature spray painting, emergency switch, power switch, fault indicator light. The requirement of electric cabinet external power line is 3 phase 4 wire, single line ≥ 10 mm ²	
Environmental system	No, but Air-extracting cabinet and Environmental protection cabinet is optional.	

Car Spray Booth

GSP-3000



ราคา 480,000 บาท

Model No.	GSP-3000	
Product Name	Spray booth	
External Size	7.00*5.35*3.40(m)	
Internal Size	6.90*3.90*2.65(m)	
Door Size	3.00*2.60(m)	
Total Power	16 KW	
Wall panel	Color	White
	material	EPS, Thickness: 50mm
	Color steel	Thickness: 0.426mm
Basement	Floor	Steel structure, 2 rows of grids, 3 rows of veins board.
	Ramps	2 pieces diamond plates style ramps 630*2000mm(W*L)
Light system	Top light	8Sets*4Pcs*16W=512W, room illumination ≥800LUX
	Side light	8Sets*2Pcs*16W
Intake system	Intake fan	1 PC 7.5kw turbo fan, air capacity: 23000 m3/h
Exhaust system	Exhaust fan	1 PC 7.5kw turbo fan, air capacity: 23000 m3/h
Filter system	Intake air	Initial effect filter
	Static pressure chamber	600G Sub-high efficiency filtration cotton
Heating system	Burner	Riello G20 diesel burner
	exchange	Stainless steel
	Pneumatic Operated Damper makes the spraying and baking cycle.	
Electronic control system	With 2 side lighting, normal /constant temperature spray painting, emergency switch, power switch, fault indicator light. The requirement of electric cabinet external power line is 3 phase 4 wire, single line ≥ 10 mm ²	
Environmental system	With activated carbon Environmental protection cabinet.	

Car Spray Booth

GSP-2000




ราคา 450,000 บาท

Model No.	GSP-2000	
Product Name	Spray booth	
External Size	7.00*5.35*3.40(m)	
Internal Size	6.90*3.90*2.65(m)	
Door Size	3.00*2.60(m)	
Total Power	14.50 KW	
Wall panel	Color	White
	material	EPS, Thickness: 50mm (Rock wool is optional)
	Color steel	Thickness: 0.376mm
Basement	Floor	Steel structure, 2 rows of grids, 3 rows of veins board.
	Ramps	2 pieces diamond plates style ramps 630*2000mm(W*L)
Light system	Top light	8Sets*4Pcs*16W=512W, room illumination ≥800LUX
	Side light	No
Intake system	Intake Fan	2 set of 3kw centrifugal fan, air capacity: 22000 m3/h
Exhaust system	Exhaust fan	1 set of 5.5kw centrifugal fan, air capacity: 15500 m3/h
Filter system	Intake air	Initial effect filter.
	Static pressure chamber	600G Sub-high efficiency filtration cotton
Heating system	Burner	Riello G20 diesel burner
	exchange	Stainless steel
	Imported electric damper performer.	
Electronic control system	With 2 side lighting, normal /constant temperature spray painting, emergency switch, power switch, fault indicator light. The requirement of electric cabinet external power line is 3 phase 4 wire, single line ≥ 10 mm ²	
Environmental system	With activated carbon Environmental protection cabinet.	

Car Spray Booth

GSP-5000

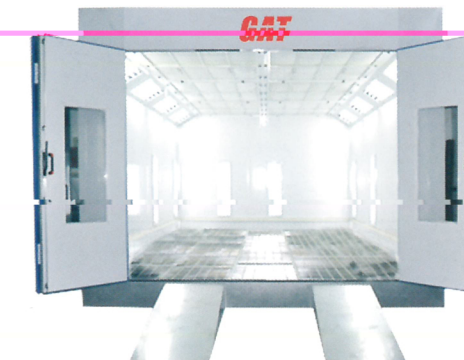

ราคา 600,000 บาท

Model No.	GSP-5000	
Product Name	Spray booth	
External Size	7.00*5.35*3.40(m)	
Internal Size	6.90*3.90*2.65(m)	
Door Size	3.00*2.60(m)	
Total Power	16.50 KW	
Wall panel	Color	White
	material	EPS, Thickness: 50mm
	Color steel	Thickness: 0.426mm
Basement	Floor	Steel structure, 3rows of grids, 2rows of veins board
	Ramps	2 pieces diamond plates style ramps 630*2000mm(W*L)
Light system	Top light	8Sets*4Pcs*16W=512W, room illumination ≥800LUX
	Side light	8Sets*4Pcs*16W=512W
Intake system	Intake Fan	2 set of 4kw centrifugal fan, air capacity: 25000 m3/h
Exhaust system	Exhaust fan	1 PC 7.5kw turbo fan, air capacity: 23000 m3/h
Filter system	Intake air	Initial effect filter.
	Static pressure chamber	600G Sub-high efficiency filtration cotton.
Heating system	Burner	Riello GR5S burner
	exchange	Stainless steel
	Pneumatic Operated Damper makes the spraying and baking cycle.	
Electronic control system	With 2 side lighting, normal /constant temperature spray painting, emergency switch, power switch, fault indicator light. The requirement of electric cabinet external power line is 3 phase 4 wire, single line ≥ 10 mm ²	
Environmental system	With activated carbon Environmental protection cabinet.	